IS1212-R Flexi-Wing® Rolled

These self-adhesive perimeter seals are fitted in the rebate of a door frame to contain smoke, sound, draughts, dust and light. Strategically located in the impact free zone, the seal adheres to the frame quickly and easily without having to remove the door. The seal comes in a 250x250mm box.

The seal consists of a semi-rigid flame retardant PVC carrier combined with twin elastomeric sealing blades. An aggressive self-adhesive backing tape is situated on both sides of the carrier. NB. To ensure proper adhesion, contact surfaces must be clean & any paint well-cured.

Gap size

- IS1212-R: Required door clearance 2-3mm

Door set standard lengths

- Single: 5.6m Coil
- Long Single: 6.9m Coil
- Double: 6.7m Coil
- Long Double: 8.0m Coil

Standard colours


- Black


Approval/s

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
- Certifications GVYI.R26629, GVWZ.R26629, GVWZ7.R26629
- Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies
- Acoustically tested in accordance with AS1191, IS0140.3 and IS010140-2
- Durability tests demonstrating over 100,000 open & close cycles

Features

- Ambient (cold) temperature smoke control
- Medium temperature smoke containment (200ºC)
- Approved for use on proprietary smoke doors
- Approved for use on proprietary fire doors
- Sound containment (acoustics)
- Energy efficient

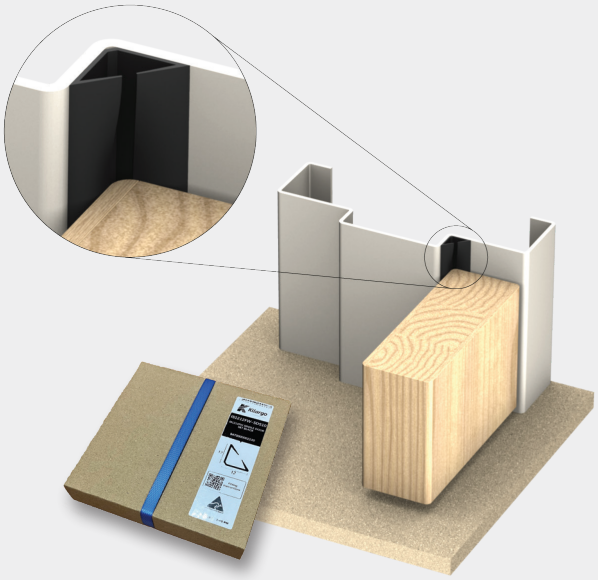



IS1212-R

All seals proudly manufactured in Australia

15 Wentworth Pl, Banyo QLD 4014, Australia
P +61 7 3635 5000 F +61 7 3861 9266 E sales@kilargo.com.au W kilargo.com.au