
DROP SEALS

LAS8014 si

MORTISED **47dB**

A durable, automatic drop seal featuring a wrap-around outer gasket with an additional internal gasket designed for superior acoustic performance. The seal features a parallel drop mechanism. It is spring-loaded to lift clear of the floor as soon as the door is opened by a few millimetres.

ID No. 662

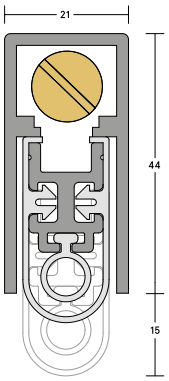

LAS8014 si



LAS8014 si (shown with LAS4002)

SYSTEM SPECIFICATIONS

Test evidence
- Smoke: BS EN 1634-3:2004 at ambient temperature.
- Acoustic: BS EN ISO 10140-1: 2010+A2: 2014 (Annex J) up to Rw 47dB.
- Durability: 100,000 cycles.

Characteristics
- Contributes towards sound, smoke, draught, and light containment.
- Suitable for wheeled traffic.
- Parallel drop mechanism.

Location
- Single swing, single and double leaf doors.
- For use on both right and left handed doors.

Use with
- Any perimeter seal. Any threshold plate.

Min/max gap size
- 6mm/15mm.

Seal material
- Grey silicone rubber.

Standard lengths
- 335mm, 435mm, 535mm, 635mm, 735mm, 835mm, 935mm, 1035mm, 1135mm and 1235mm.
- Note: Other lengths can be cut back to the next size down. The 535mm can be cut back to 495mm. The 335mm can be cut back to 255mm.

Fixing
- Pre-drilled end plates are supplied which also secure the product in place. Fixing screws are supplied.
- Both square and radiused end plates are available - state your preference at point of order.

Adjustment
- Self-levelling on uneven surfaces - can be adjusted independently of the fixing screws.

Finishes
- Silver anodised aluminium, grey silicone rubber gasket as standard.
- The non-button end cap is designed blank, creating an engineered smooth aesthetic.