
LAS1212K Batwing® on-a-stick


MEDIUM DUTY **37dB**

The LAS1212K Batwing®-on-a-stick is a smoke and acoustic seal designed for easy installation with its innovative kerf fixing feature. The 12mm profile, with a double fin design provides a reliable barrier against smoke and sound while minimising resistance when opening and closing the door.

Made from a flexible elastomeric material, the LAS1212K boasts long-lasting performance as the fins spring back to their original shape after each use. Suitable for both single and double leaf doors on the head and jambs, this Batwing® seal installs with minimal disruption, offering a simple solution for smoke and acoustic containment.



LAS1212K
Batwing®
on-a-stick

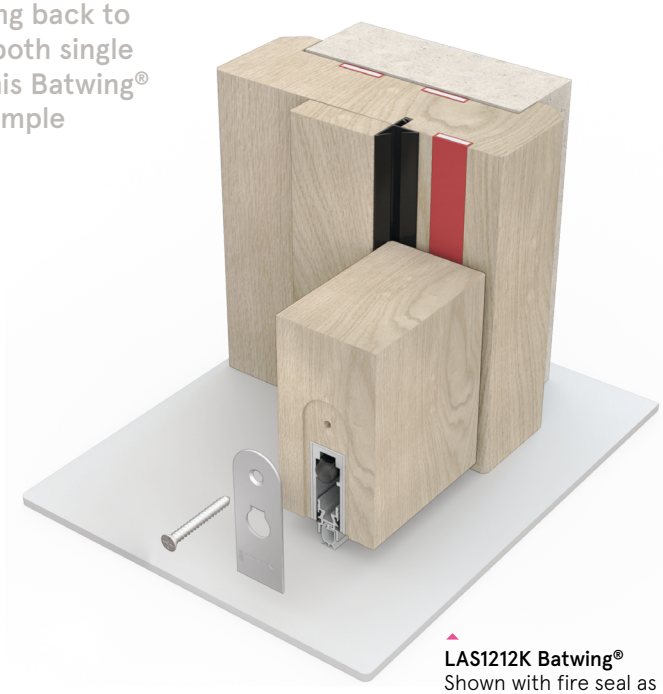

LAS1212K Batwing®
Shown with fire seal as referenced in CNA/F14171 (also shown with LAS8001 si)

SYSTEM SPECIFICATIONS

Test evidence
- Smoke: BS 476-31.1: 1983 at ambient temperature.
- Acoustic: BS EN ISO 10140-2: 2010 (up to Rw 37dB).
- Durability: minimum of 100,000 cycles.

Characteristics
- Protects against sound, smoke, draught and light.

Location
- Head and jambs of single and double leaf doors.

Use with
- Practically any drop seal.

Min/max gap size
- 3mm/4mm.

Seal material
- Co-extruded rigid back PVC with flexible fins.

Standard lengths
- 1m and 2.1m.
- Single doorset pack consisting of 1 x 1m and 2 x 2.1m.
- Other lengths to special order.

Fixing
- Route a groove, and push-fit into place.
- Groove size is 9mm x 3mm – suitable for internal or external use.

Colours
- Black, white, dark brown, light brown and grey as standard.
- Cream, red and clear are subject to MOQs.
- Note: clear Batwing® will not prevent light penetration.

Certifications
certifire (CF5179)

(R27972)

T: +44 (0)1626 834252
E: mktg@lorientuk.com

LORIENT
ASSA ABLOY