
DROP SEALS


LAS8001M

MORTISED

A slimline, mortised automatic drop seal for timber sliding doors. The end plate cleverly conceals a magnet which engages with a button in the frame, to assist the door closure and ensures the gasket remains in the dropped position without forcing the door open. The seal features a high efficiency mechanism, which lifts the seal clear of the floor as soon as the door is opened by a few millimetres; resulting in lower door operating forces.

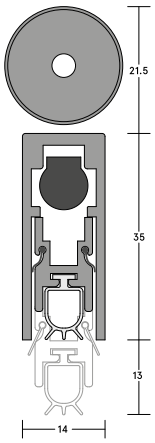

LAS8001M

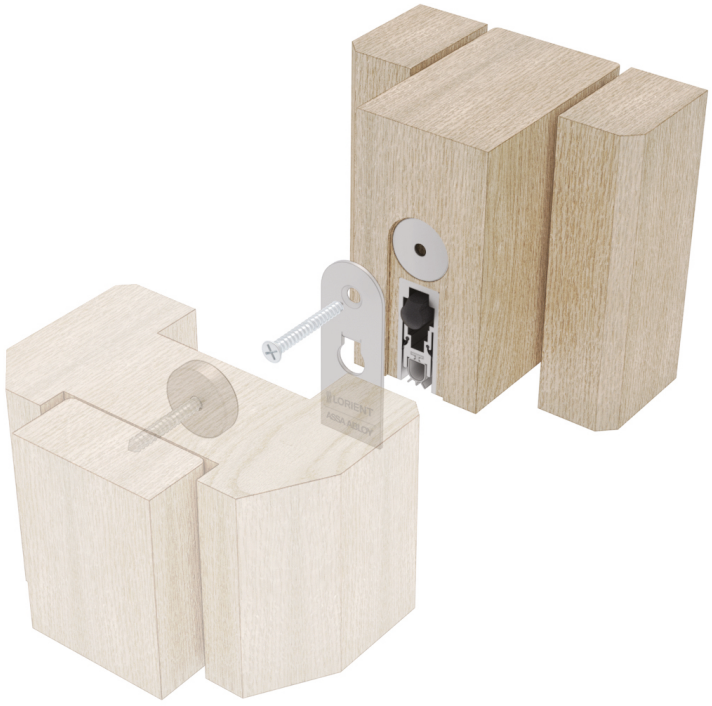

SYSTEM SPECIFICATIONS

Characteristics
- Contributes towards sound, draught, and light containment.
- Suitable for wheeled traffic.

Location
- Sliding doors.

Use with
- Any perimeter seal. Any threshold plate.

Min/max gap size
- 1mm/13mm.

Seal material
- Grey or black silicone rubber.

Standard lengths
- 335mm, 435mm, 535mm, 635mm, 735mm, 835mm, 935mm, 1035mm, 1135mm and 1235mm. Sizes above 1235mm are available on request.
- Note: Each length can be cut back to the next size down. The 335mm can be cut back to 255mm.

Fixing
- Fixing screws are supplied. This seal is mortised. Pre-drilled radiused end plates are supplied which also secure the product in place. (Square end plates available on request).
- Magnetised button is supplied to fix into the frame.

Adjustment
- Self-levelling on uneven surfaces. Can be adjusted independently of the fixing screws.
- Please note: Drop seals under 635mm are supplied with a single spring and will only operate once fully fitted and in use.

Finishes
- Silver anodised aluminium with silver end plates, and grey silicone rubber gasket as standard.
- Silver anodised aluminium with bronze end plates, and black silicone rubber gasket are subject to non-standard charges and additional lead times.
- Chrome finish magnetised button.