
# Planet KG-S Narrow

## FACE-FIXED

OPTION

48dB

A slimline, face-fixed automatic drop seal designed for glass, timber, metal, and PVC doors. Its ultra-narrow 11.5mm profile makes it ideal for minimalistic applications. Featuring a high-efficiency mechanism with a single-sided trigger, it enables parallel lowering and automatic compensation for sloping floors. Suitable for fire and smoke-shielding doors, with a seal height of up to 16mm. Designed for adhesive mounting. An optional bevel lip is available for uneven floors, accommodating gaps of up to 20mm.

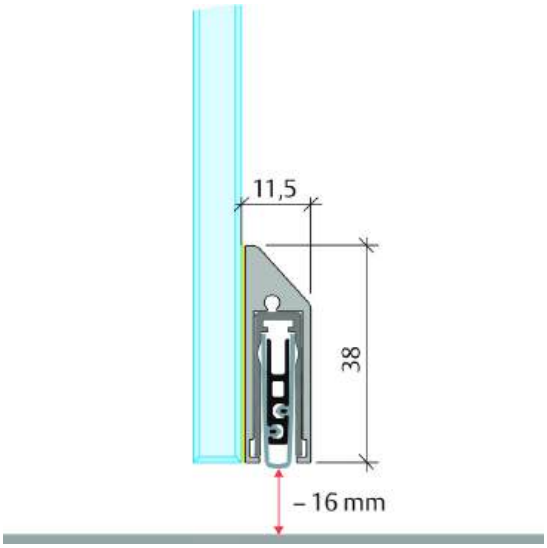


Planet KG-S Narrow Drop Seal



Planet KG-S Narrow



## SYSTEM SPECIFICATIONS

### Key benefits
- For new and existing doors.
- Unilateral and silent actuation.
- No scraping / trailing on the floor, thanks to parallel drop.
- High-quality silicone lip, lateral protrusion adjustable.
- Can be shortened to the next smaller stock length.

### Characteristics
- Suitable for use on glass, timber, metal & PVC doors.
- Sound insulation up to 48dB.

### Possible door types (depending on options)
- Single swing doors, double swing doors, sliding doors.

### Profile size
- 11.5mm x 38mm.

### Max drop height
- 16mm.

### Profile material
- Aluminium.

### Seal material
- **Planet KG-S narrow RD:** High-quality silicone.
- **Planet KG-S narrow FH+RD:** High-quality self-extinguishing silicone with aluminium carrier.
- Bevel lip available for uneven floors (Left-handed or right-handed variants.

### Adjustment
- Self-levelling on uneven surfaces.
- Automatic compensation of sloped floors.
- Easy drop height adjustment.
- Door bottom can be adjusted without seal removal.

### Drop height adjustment
- Using 3mm allen key.

### Standard lengths
- 459mm, 584mm, 709mm, 834mm, 959mm, 1084mm, 1209mm, 1334mm, 1459mm.
- Note: Each length can be cut back by 125mm.
- Sizes up to 6m are available to special order.

### Fixing
- Glued to the side with VHB adhesive tape or silicon or UV.

### Accessories (supplied)
- Planet stopping plate, type 1 (stainless steel) and cover plate.

### Finishes
- Silver anodised EV1 as standard.
- Matt anodised stainless steel (INOX) or black C35 matt anodised or special colours powder coated (RAL / DB / NCS) to special order.

# Planet KG-S Set Narrow

## HOW TO ORDER

### Planet KG-S Set Narrow FH + RD

| | | SILVER ANODISED | | MATT STAINLESS STEEL | | BLACK | |
|---|---|---|---|---|---|---|---|
| **Length** | **Cut back** | **Item No.** | **Order code** | **Item No.** | **Order code** | **Item No.** | **Order code** |
| 459mm | >335mm | 35046-S | PLA835/0459-SA00 | 35046-SX | PLA835/0459-SH00 | 35046-SB | PLA835/0459-SN00 |
| 584mm | >460mm | 35059-S | PLA835/0584-SA00 | 35059-SX | PLA835/0584-SH00 | 35059-SB | PLA835/0584-SN00 |
| 709mm | >585mm | 35071-S | PLA835/0709-SA00 | 35071-SX | PLA835/0709-SH00 | 35071-SB | PLA835/0709-SN00 |
| 834mm | >710mm | 35084-S | PLA835/0834-SA00 | 35084-SX | PLA835/0834-SH00 | 35084-SB | PLA835/0834-SN00 |
| 959mm | >835mm | 35096-S | PLA835/0959-SA00 | 35096-SX | PLA835/0959-SH00 | 35096-SB | PLA835/0959-SN00 |
| 1084mm | >960mm | 35109-S | PLA835/1084-SA00 | 35109-SX | PLA835/1084-SH00 | 35109-SB | PLA835/1084-SN00 |
| 1209mm | >1085mm | 35121-S | PLA835/1209-SA00 | 35121-SX | PLA835/1209-SH00 | 35121-SB | PLA835/1209-SN00 |
| 1334mm | >1210mm | 35134-S | PLA835/1334-SA00 | 35134-SX | PLA83/1334-SH00 | 35134-SB | PLA835/1334-SN00 |
| 1459mm | >1335mm | 35146-S | PLA835/1459-SA00 | 35146-SX | PLA835/1459-SH00 | 35146-SB | PLA835/1459-SN00 |
| <6000mm per m | - | 35600-S | PLA835/6000-SA00 | 35600-SX | PLA835/6000-SH00 | 35600-SB | PLA835/6000-SN00 |

